




AGRIPLUS(R-1)

Tractor in Field and Haulage

- ✔ **Excellent Traction & Grip:** Aggressive triple-angle lugs bite into soft soil, delivering superior traction for plowing, tilling, and heavy field work
- ✔ **High Load Carrying Capacity:** Strong nylon carcass structure provides Superior strength and Penetration resistance
- ✔ **Self-Cleaning Tread:** The widely spaced lugs prevent the tire from clogging with mud or debris, maintaining good grip even in adverse conditions.
- ✔ **Durability & Longevity:** Advanced tread compound deliver longer tread life and exceptional durability in both farm and haulage operations.

Application

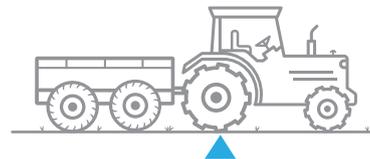

TECHNICAL SPECIFICATIONS

Tyre Size	PR	TT/TL	LI/SS	Recomm. Rim	Alternate Rim	Unloaded Inflated Dimension		Static Loaded Radius	Rolling Circumference	Max Speed	Load Carrying Capacity (Max Load)	Inflation Pressure
						SW mm	OD mm					
12.4-28	12	TT	125 A6	W11	W10, DW11	330	1290	594	3858	30	1650	2.5
13.6-28	12	TT	128 A6	W12	W10, DW11	365	1345	617	4023	30	1800	2.3
14.9-28	12	TT	134 A6	W13	W12, DW13	395	1389	635	4154	30	2120	2.3
16.9-28	12	TT	143 A6	W15L	W14L, DW15L	435	1450	660	4337	30	2725	2.4