




BT 112

Moderate Highway Lug

- ✓ Longer tyre life & reliable performance
- ✓ Cross lug design for good traction
- ✓ Durable casing for multiple retreads
- ✓ Optimum mileage in highway application

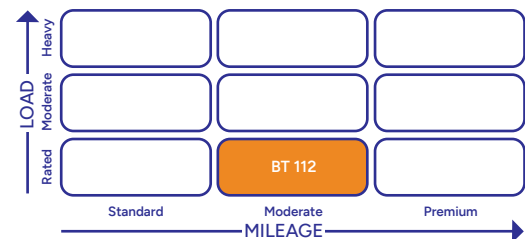

Application



TECHNICAL SPECIFICATIONS

Size	Pattern	Ply Rating	Rim Recommended	Sectional Width (mm)	Overall Diameter (mm)	Tube Valve Code
7.50-16	BT 112	14/16	6.0	213	824	TR 77A
8.25-20	BT 112	14/16	6.5	239	1006	TR 175A
9.00-20	BT 112	16	7.0	261	1054	TR 175A
10.00-20	BT 112	16	7.5	280	1078	TR 78A
11.00-20	BT 112	16/18	8.0	292	1100	TR 78A