




BT 334*

Regional Rib

- ✓ High mileage tread for longer life
- ✓ Cooler running for high speed application
- ✓ Strong casing for carrying extra load

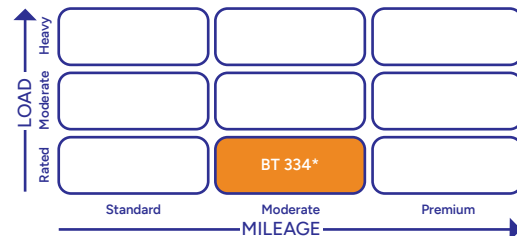

Application



TECHNICAL SPECIFICATIONS

Size	Pattern	Ply Rating	Rim Recommended	Sectional Width (mm)	Overall Diameter (mm)	Tube Valve Code
9.00-20	BT 334*	14/16	7.0	260	1048	TR 175A