




BT 339+

Load and Mileage Highway Rib

- ✓ Equally spaced tie bar & higher non skid depth for higher mileage
- ✓ 5 rib tread design with wider central rib delivers better stability & uniform wear
- ✓ Sinusoidal groove provides better grip on wet & dry conditions
- ✓ Superior cut resistant tread compound

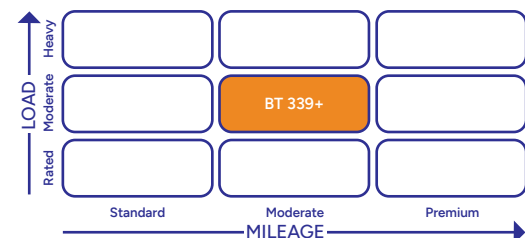

Application



TECHNICAL SPECIFICATIONS

Size	Pattern	Ply Rating	Rim Recommended	Sectional Width (mm)	Overall Diameter (mm)	Tube Valve Code
9.00-20	BT 339+	16	7.0	262	1045	TR 175A
10.00-20	BT 339+	16	7.5	286	1079	TR 78A