




BT 339

Regional Rib

- ✓ High mileage tread for longer life
- ✓ Cooler running tread for high speed application
- ✓ Stronger casing ensures more load carrying capacity

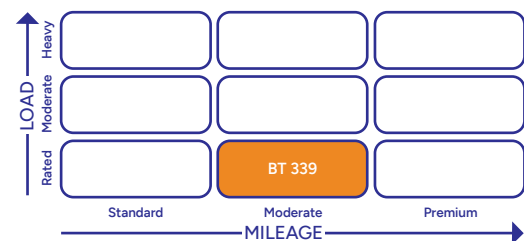

Application



TECHNICAL SPECIFICATIONS

Size	Pattern	Ply Rating	Rim Recommended	Sectional Width (mm)	Overall Diameter (mm)	Tube Valve Code
165 D 12	BT 339	8	4.5	162	570	TR 13
165/80 D 13	BT 339	8	4.5	161	608	TR 13
165 D 14	BT 339	8	4.5	166	628	TR 13
7.00-16	BT 339	12/14	5.5	202	798	TR 77A
7.50-16	BT 339	14/16	6	215	820	TR 77A
10.00-20	BT 339	16	7.5	274	1068	TR 78A