




FARM HAUL PLATINA

High Performance

- Suitable for both haulage and agriculture
- Wider centre & notch shoulder rib for better stability
- Longer hours in field & more mileage on road
- Stronger carcass for higher life
- High abrasion and flex fatigue resistant tread compound

Application

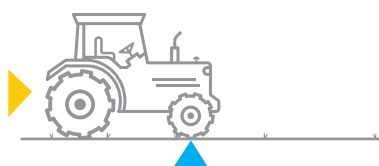

TECHNICAL SPECIFICATIONS

Size	Pattern Name	Type (TT / TL)	Ply Rating	TRA Code	Rim Rec.	Specified Rim Diameter (mm)	Sectional Width (mm)	Overall Diameter (mm)	Tube Valve Code	Rolling Cir. (mm)	Static Loaded Radius (mm)	Speed Radius Index	Load Index	Speed Symbol	Load range (kg)	Inflation Pressure (psi)
6.00-16	Farm Haul Platina	TT	8	F2	4.50E	405.6	171	734	TR 15	2195	338	350	-	-	-	65