




# RUSTOM

## Regional Semi Lug

- ✓ Specially designed tread for better traction & mileage
- ✓ Cut & chip resistant tread compound for on/off application
- ✓ Strong casing ensures multiple retreads

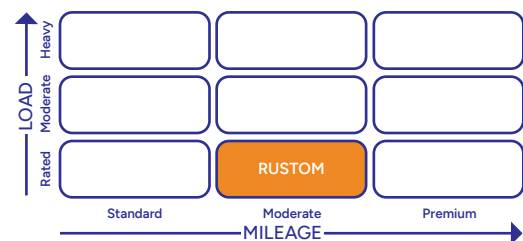

### Application



## TECHNICAL SPECIFICATIONS

Size	Pattern	Ply Rating	Rim Recommended	Sectional Width (mm)	Overall Diameter (mm)	Tube Valve Code
9.00-20	RUSTOM	16/18	7.0	264	1056	TR 175A
12.00-20	RUSTOM	18	8.0	315	1140	TR 78A
12.00-24	RUSTOM	18/20	8.5	315	1252	TR 78A